

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
15 September 2005 (15.09.2005)

PCT

(10) International Publication Number
WO 2005/085103 A1

(51) International Patent Classification⁷: **B65G 47/244**,
47/28

(21) International Application Number:
PCT/CA2005/000341

(22) International Filing Date: 4 March 2005 (04.03.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/549,922 5 March 2004 (05.03.2004) US

(71) Applicant (for all designated States except US): **SIDEL (CANADA) INC.** [CA/CA]; 1045 Autoroute Chomedey, Laval, Quebec H7W 4V3 (CA).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **RANGER, Michel** [CA/CA]; 640 Terrasse du Ruisseau, App. 302, La-chine,(Quebec) H8T 3L6 (CA).

(74) Agents: **DUBUC, J. et al.**; Goudreau Gare Dubuc, Stock Exchange Tower, 800 Place Victoria, Suite 3400, P.O Box 242, Montreal, Quebec H4Z 1E9 (CA).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

[Continued on next page]

(54) Title: PACKAGE ALIGNMENT SYSTEM FOR A CONVEYER

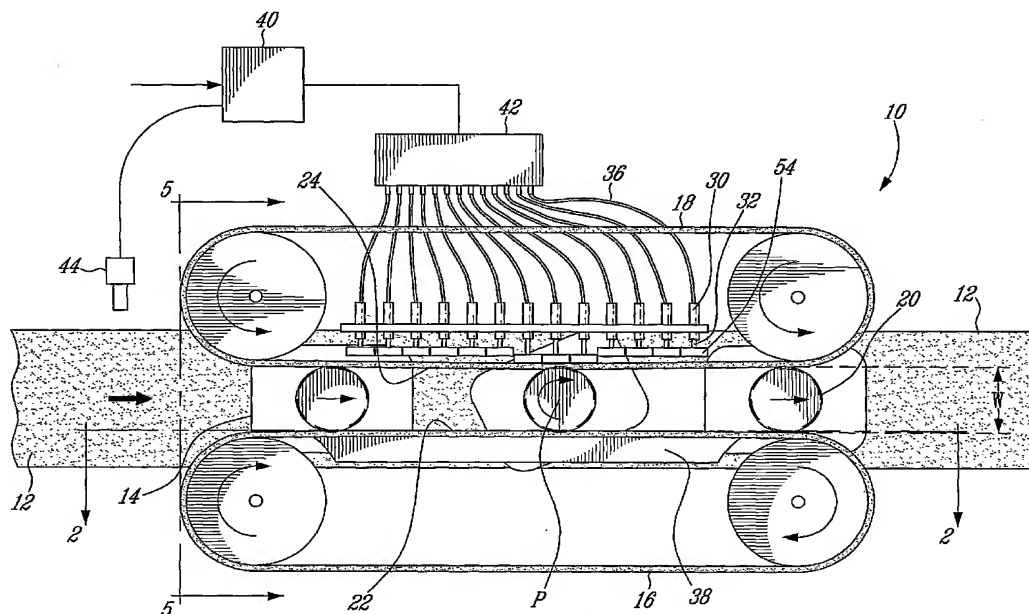

(57) Abstract: An assembly for rotating a selected article in a stream of like articles without rotating an adjacent article, each of the articles moving along a conveying surface of a conveyor belt with a speed of forward travel and comprising an axis which is normal to the conveying surface. The assembly comprises a mechanism for revolving the selected article around the axis without changing the speed of forward travel of the axis. A distance travelled by the axis of the revolving selected article is greater than a distance between the axis of the revolving selected article and the axis of the non-revolving adjacent article.

WO 2005/085103 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.